

Datasheet

Touch Nightlight Air

Part No: 100476



About the product



The Loxone Touch Nightlight is more than just a light. It's an alarm clock, night light, ambient light source and intuitive smart home switch all-in-one. Thanks to these features and its versatility, it is a great addition to every bedroom, from the master suite to a child's bedroom.

- Wake up alarm clock fully integrated with your smart home
- Integrated colour-changing light
- Ambient light source
- Digital display of time and outside temperature
- Incorporates a Touch Pure for intuitive control
- Freely positionable thanks to Loxone Air technology

Technical data

Power supply	5VDC via Micro USB Power supply
Power consumption	typ. <150mW, max. 5W
Power loss	max. 5W
Interfaces	Loxone Air: 868MHz (SRD Band Europe), 4 channels available 915MHz (ISM Band Region 2), 10 channels available max. Power 3.16mW
Ambient temperature	-40 ... 35°C / -40 ... 91°F
Humidity	max. 95% r.H. (non condensing)
Touch points	7 touch points, capacitive touch detection
Click feedback	Yes
Alarm clock function	Alarm time adjustable on the device, built-in alarm signal or alarm playback via Audioserver


Connection diagram

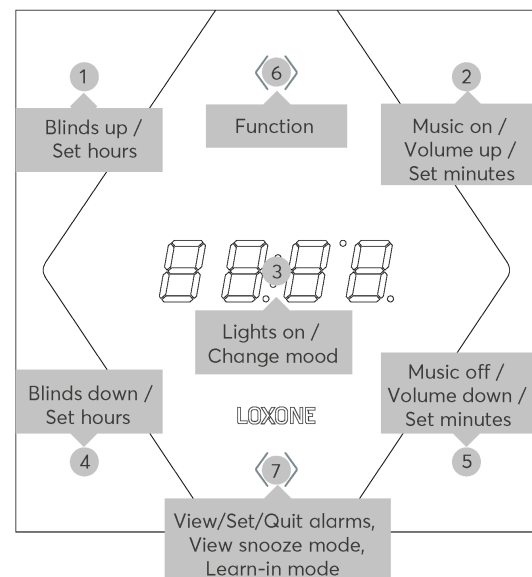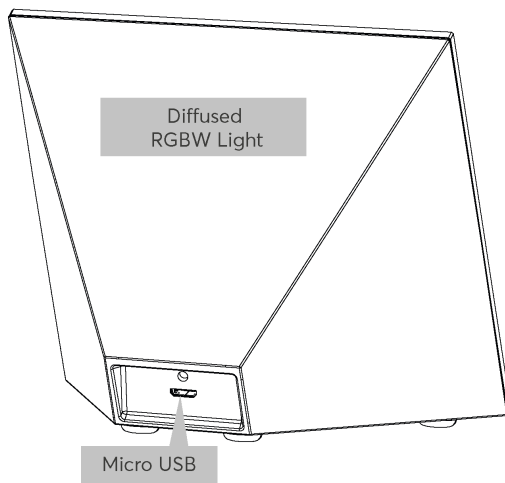

Product features

Colours	White: RAL9003
Finish	Matte

Weight & dimensions

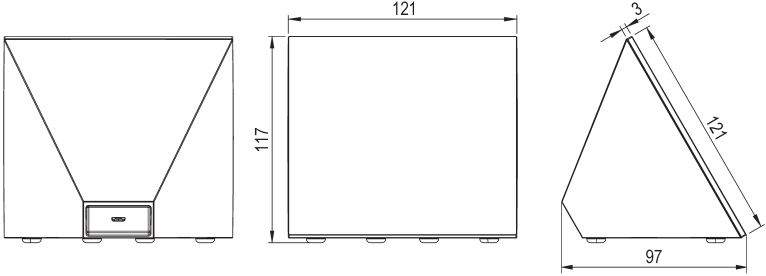Net weight	395g
Total weight	667g
Product dimensions	120x120x75mm / 4.72x4.72x2.95" (LxWxH)
	
Pack size	190x215x91 mm / 7.48x8.46x3.58" (LxWxH)

Certifications & Standards

Safety rating	IP20
---------------	------

Installation must be carried out by a qualified electrician in accordance with the relevant regulations.

Datasheet **Touch Nightlight Air** Artikel Nr.: 100476



Über das Produkt



Das Loxone Nightlight ist mehr als ein Nachtlcht. Es ist Nachtlcht, Ambientelicht, Wecker, Bediengerät und Alarmgeber zugleich. Dank seiner Vielseitigkeit ist es die perfekte Ergänzung in all Ihren Wohn- und Schlafräumen.

- Nacht- bzw. Ambientelicht
- Anzeige von Uhrzeit und Temperatur
- 100% ins Smart Home eingebundener (Licht-) Wecker
- Einstellen der Weckzeit direkt über das Touch Nightlight
- Integrierter Touch Pure für Loxone Tastenstandard
- Rechtzeitig informiert dank integrierter Alarmfunktionen
- Frei positionierbar dank der Air Technologie

Technische Daten

Spannungsversorgung	5VDC mit Micro USB Netzteil
Leistungsaufnahme	typ. <150mW, max. 5W
Leistungsverlust	max. 5W
Schnittstellen	Loxone Air: 868MHz (SRD Band Europa), 4 Kanäle wählbar 915MHz (ISM Band Region 2), 10 Kanäle wählbar max. Sendeleistung 3,16mW
Umgebungstemperatur	-40 ... 35°C / -40 ... 91°F
Luftfeuchtigkeit	max. 95% r.H. (nicht kondensierend)
Tastpunkte	7 Tastpunkte, kapazitive Berührungserkennung
Klick Feedback	Ja
Weckerfunktion	Weckzeit am Gerät einstellbar, eingebautes Alarmsignal oder Alarmwiedergabe über Audioserver


Anschlussplan

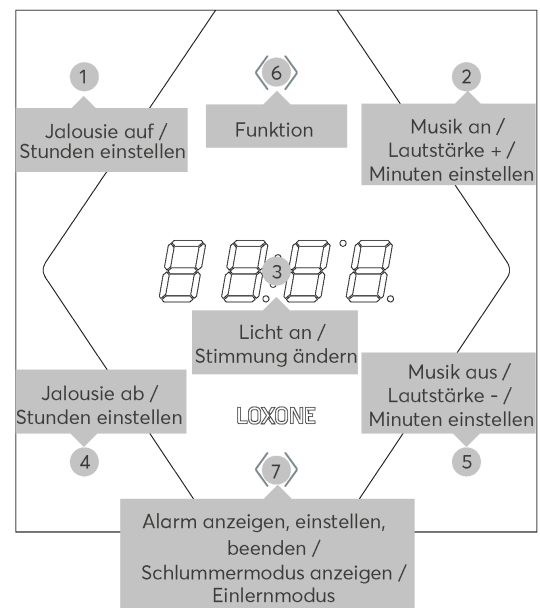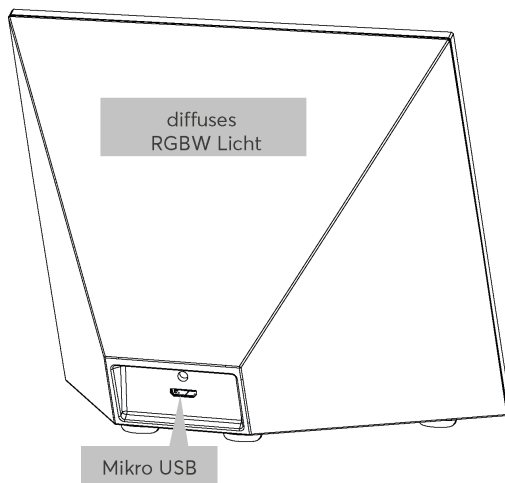

Produkteigenschaften

Farbe	Weiß: RAL9003
Glanzgrad	Matt

Gewicht & Abmessungen

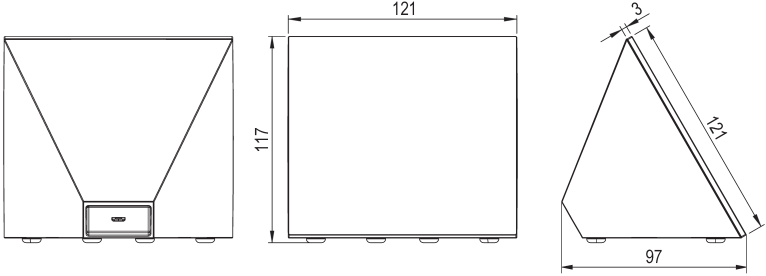Nettogewicht	395g
Bruttogewicht	667g
Produktmaße	120x120x75mm / 4,72x4,72x2,95" (LxBxH)
	
Packmaß	190x215x91 mm / 7,48x8,46x3,58" (LxBxH)

Zertifizierungen & Standards

Schutzart	IP20
------------------	------

Die Installation muss nach den einschlägigen Vorschriften durch eine Elektrofachkraft erfolgen.

Veröffentlicht von
Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com