

Datasheet

LED Ceiling Light RGBW Air White

Part No: 100286



About the product

With its built-in motion and brightness sensors, the full-colour LED Ceiling Light is a powerful all-rounder that can conspicuously fulfil the requirement of smart lighting.

- Integrated motion sensor
- Integrated brightness sensor
- Timeless design housing the latest technology
- High lumen output
- Uniform spread of light with diffuser
- Smooth, gentle dimming curve
- Available in white or anthracite finish


Technical data

Power supply	220 ... 240VAC, 50Hz
Power consumption	Standby: <500mW Red: 10W Green: 7.9W Blue: 4.7W Warm White: 22.2W max. 24W
Dimming range	0 ... 100%
Ambient temperature	-40 ... 55°C / -40 ... 131°F
Interface	Loxone Air: 868MHz (SRD Band Europe), 4 channels available 915MHz (ISM Band Region 2), 10 channels available max. power 3.16mW
Humidity	max. 95% r.H. (non condensing)
PWM frequency	123Hz
Energy efficiency	A+
Motion detection	passive infrared sensor
Motion detection range	8m / 26.25ft(at height of 3m / 9.84ft)
Measuring range of brightness sensor	0.045 ... 188000lx
Detection angle vertical	110°
Detection angle horizontal	360°
Colour temperature	typ. 3000k (warm white)
Luminous flux	typ. 1480lm (warm white)
Colour rendering index (CRI)	min. 90, (R9 min. 50)
Beam angle	120°
Unified glare rating (UGR)	<19

Connections

Wire cross-section	0.75 ... 2.5mm ² / AWG18 ... 13
Stripping length	5mm / 0.2"
Torque of terminal blocks	0.35 ... 0.4Nm / 0.26 ... 0.3 lbf ft
Temperature resistance	min. 80°C / 176°F for IEC, min. 75°C / 167°F for UL


Connection diagram

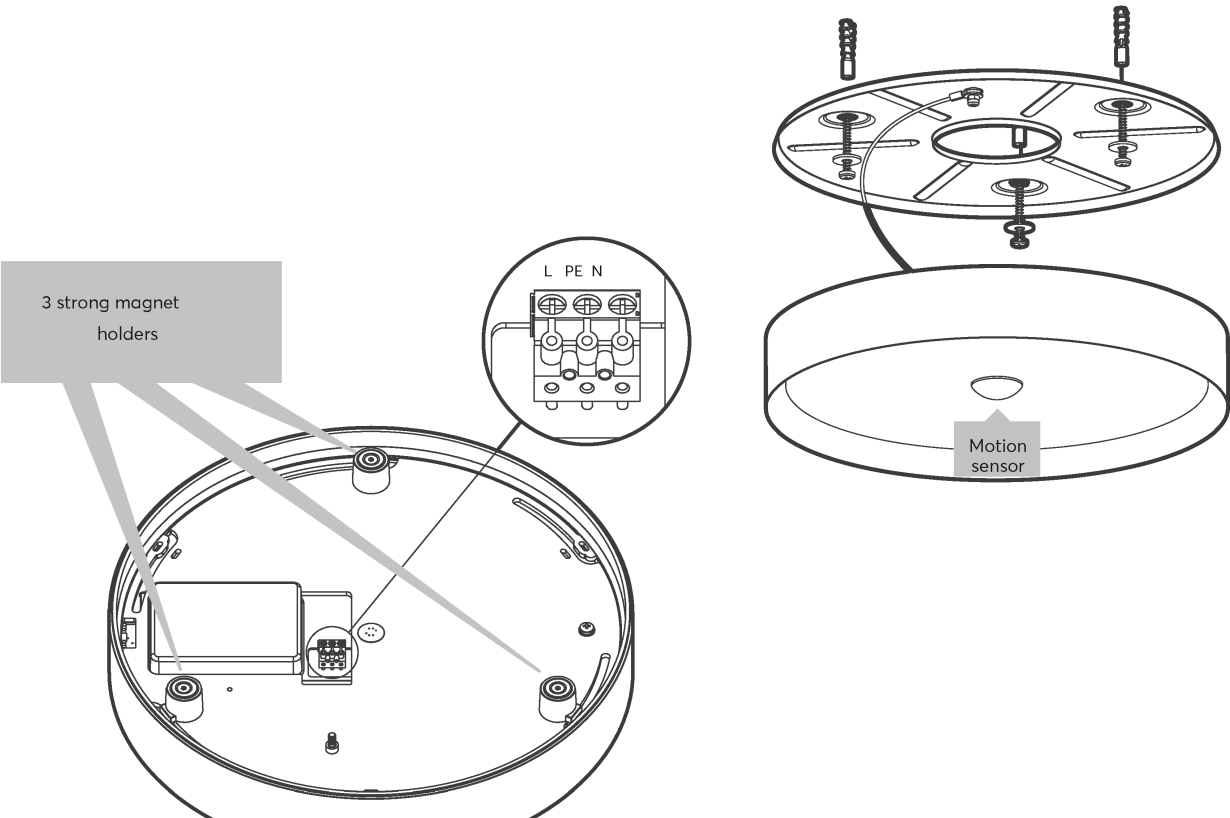

Product features

Colours	Anthracite: RAL 7021 - Part No. 100287 White: RAL 9003 - Part No. 100286
Material	Alu and Plastic
Finish	Matte

Weight & dimensions

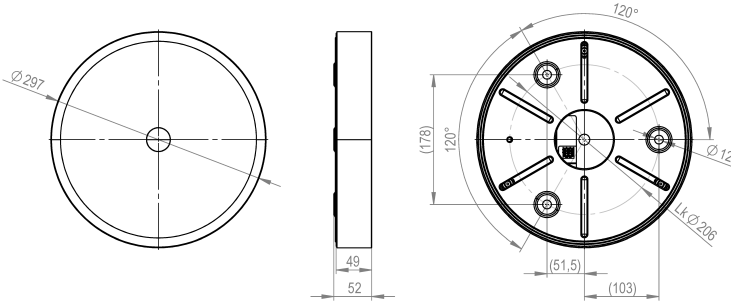Net weight	2600g
Total weight	2800g
Product Dimensions	D: 298mm / 11.73"H: 50mm / 2"
	
Pack size	355x355x55mm / 13.98x13.98x2.17" (LxWxH)

Certifications & Standards

Safety rating	IP20
---------------	------

Installation must be carried out by a qualified electrician in accordance with the relevant regulations.

Datasheet

LED Ceiling Light RGBW Air Weiß

Artikel Nr.: 100286



Über das Produkt

Die LED Deckenleuchte übernimmt mit ihrem integrierte Bewegungsmelder viele Aufgaben und wird zum unauffälligen Mittelpunkt Ihres Beleuchtungskonzepts.

- integrierter Bewegungsmelder und Helligkeitssensor
- zeitloses, puristisches Design
- warmweißes und farbiges Licht
- hohe Leuchtkraft
- homogene Leuchtfläche
- sanftes Dimmverhalten
- in den Farben Weiß & Anthrazit erhältlich


Technische Daten

Spannungsversorgung	220 ... 240VAC, 50Hz
Leistungsaufnahme	Standby: <500mW Rot: 10W Grün: 7,9W Blau: 4,7W Warmweiß: 22,2W max. 24W
Dimmbereich	0 ... 100%
Umgebungstemperatur	-40 ... 55°C / -40 ... 131°F
Schnittstelle	Loxone Air: 868MHz (SRD Band Europa), 4 Kanäle wählbar 915MHz (ISM Band Region 2), 10 Kanäle wählbar max. Sendeleistung 3,16mW
Luftfeuchtigkeit	max. 95% r.H. (nicht kondensierend)
PWM Frequenz	123Hz
Energieeffizienz	A+
Bewegungserkennung	passiver Infrarotsensor
Reichweite der Bewegungserkennung	8m / 26.25ft(in 3m / 9.84ft Höhe)
Messbereich Helligkeitssensor	0,045 ... 188.000lx
Erfassungswinkel vertikal	110°
Erfassungswinkel horizontal	360°
Farbtemperatur	typ. 3000k (warmweiß)
Lichtstrom	typ. 1480lm (warm white)
Farbwiedergabeindex (CRI)	min. 90, (R9 min. 50)
Strahlwinkel	120°
Einheitliche Blendungsbewertung (UGR)	<19

Anschlüsse

Leiterquerschnitt	0,75 ... 2,5mm ² / AWG18 ... 13
Abisolierlänge	5mm / 0,2"
Drehmoment der Klemmen	0,35 ... 0,4Nm / 0,26 ... 0,3 lbf ft
Temperaturbeständigkeit	min. 80°C / 176°F for IEC, min. 75°C / 167°F for UL


Anschlussplan

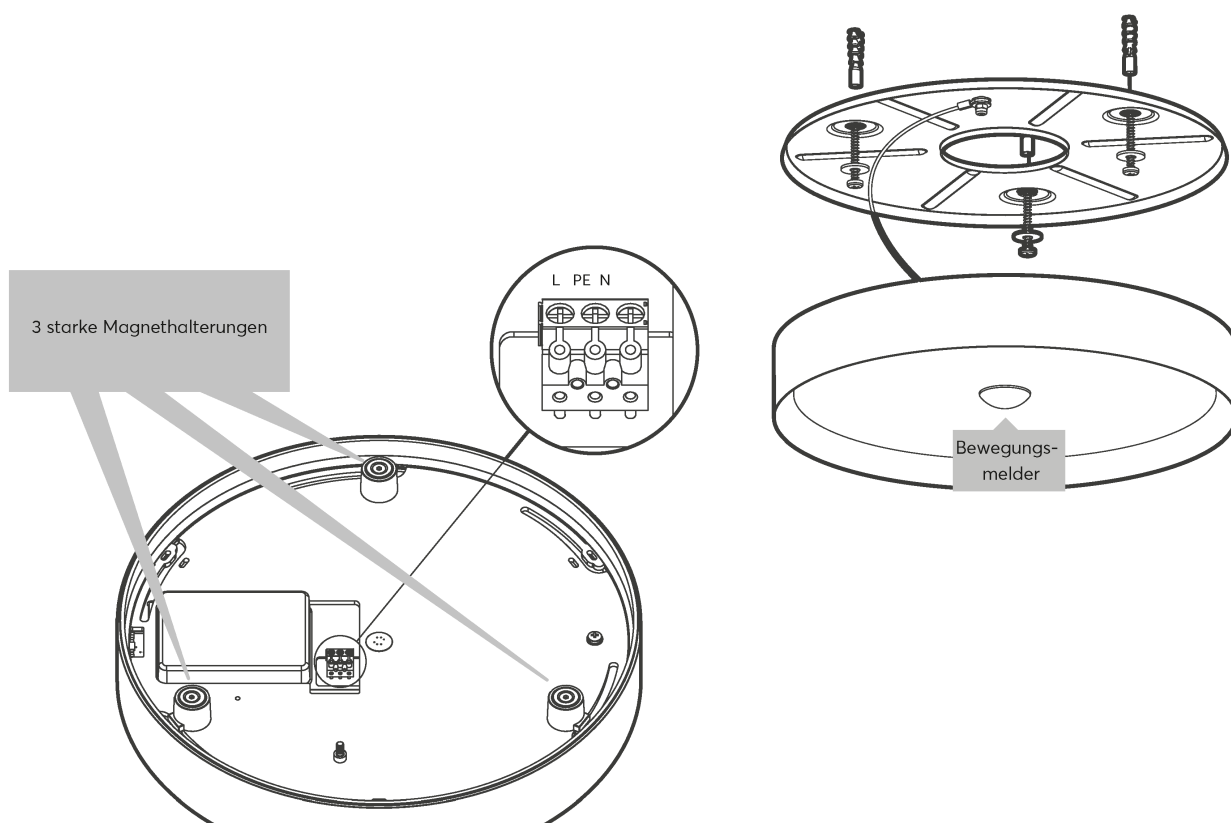

Produkteigenschaften

Farben	Anthrazit: RAL 7021 - Art. Nr. 100287 Weiß: RAL 9003 - Art. Nr. 100286
Material	Alu und Kunststoff
Glanzgrad	Matt

Gewicht & Abmessungen

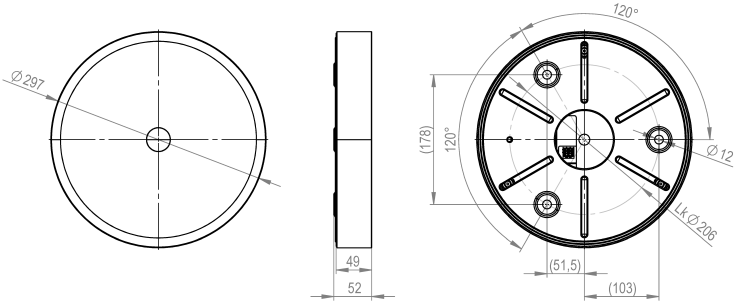Nettogewicht	2600g
Bruttogewicht	2800g
Produktmaße	D: 298mm / 11,73"H: 50mm / 2"
	
Packmaß	355x355x55mm / 13,98x13,98x2,17" (LxBxH)

Zertifizierungen & Standards

Schutzart	IP20
-----------	------

Die Installation muss nach den einschlägigen Vorschriften durch eine Elektrofachkraft erfolgen.

Veröffentlicht von
Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com